

10/552227

PCT/IB 04 / 01045



( 3 0. 03. 04 )



INVESTOR IN PEOPLE

REC'D 08 APR 2004

WIPO

PCT

The Patent Office  
 Concept House  
 Cardiff Road  
 Newport  
 South Wales  
 NP10 8QQ


I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.


Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

**PRIORITY DOCUMENT**  
 SUBMITTED OR TRANSMITTED IN  
 COMPLIANCE WITH  
 RULE 17.1(a) OR (b)

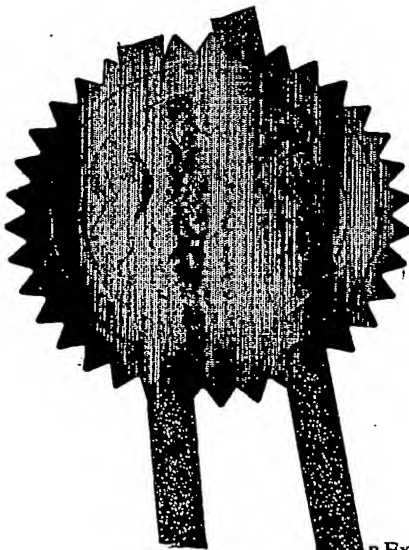

Signed

Dated 22 January 2004

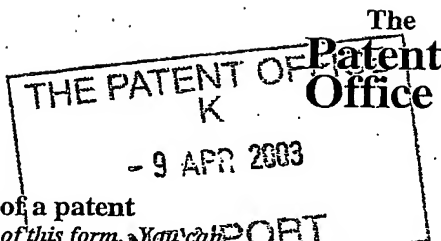

1/77

**Request for grant of a patent**

(See notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

**The Patent Office**

Cardiff Road  
Newport  
Gwent NP10 8QQ

1. Your reference	PHGB 030042GBP		
2. Patent application number (The Patent Office will fill in this part)	<div style="display: flex; justify-content: space-between;"> <div>0308168.4</div> <div> <small>9 APR 03 E798929-2 D02879</small>  <small>P01/7700 0.00-0308168.4</small> </div> </div>		
3. Full name, address and postcode of the or of each applicant (underline all surnames)	KONINKLIJKE PHILIPS ELECTRONICS N.V. GROENEWOUDSEWEG 1 5621 BA EINDHOVEN THE NETHERLANDS 07419294001		
Patents ADP Number (if you know it)  If the applicant is a corporate body, give the country/state of its incorporation	THE NETHERLANDS		
4. Title of the invention	RECEIVER HAVING DC OFFSET VOLTAGE CORRECTION		
5. Name of your agent (if you have one)			
"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)  Patents ADP number (if you know it)	Philips Intellectual Property & Standards Cross Oak Lane Redhill Surrey RH1 5HA  08359655001		
6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (if you know it) the or each application number	Country	Priority Application number	Date of filing
7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application	Number of earlier application	Date of filing (day/month/year)	
8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (Answer "Yes" if:	YES		
a) any applicant named in part 3 is not an inventor, or b) there is an inventor who is not named as an applicant, or c) any named applicant is a corporate body. See note (d))			

**Patents Form 1/77**

9. Enter the number of sheets for any of the following items you are filing with this form.  
Do not count copies of the same document.

Continuation sheets of this form

Description

6

Claims(s)

2

Abstract

1

Drawings

2

only

*[Handwritten signature]*

10. If you are also filing any of the following, state how many against each item:

Priority Documents

Translations of priority documents

Statement of inventorship and right

to grant of a patent (*Patents Form 7/77*)

Request for preliminary examination and

search (*Patents Form 9/77*)

Request for substantive examination

(*Patents Form 10/77*)

Any other documents

(*Please specify*)

11. I/We request the grant of a patent on the basis of this application.

Signature

A G WHITE

*[Handwritten signature of A G White]*

Date 8/4/2003

12. Name and daytime telephone number of person to contact in the United Kingdom

01293 81 5576

P J MABEY

**Warning**

*After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.*

**Notes**

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 0645 500505.*
- Write your answers in capital letters using black ink or you may type them.*
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.*
- If you have answered "Yes" Patents Form 7/77 will need to be filed.*
- Once you have filled in the form you must remember to sign and date it.*

## DESCRIPTION

## RECEIVER HAVING DC OFFSET VOLTAGE CORRECTION

5       The present invention relates to a receiver having dc offset voltage correction and to method of dc offset voltage correction in a demodulated signal. The receiver may have particular, but not exclusive, application in radio systems operating in accordance with Bluetooth™

10       The problem of unwanted dc offsets in radio receivers is well known and there have been many proposals for overcoming it. Patent Specification WO 02/54692 (Applicant's reference PHGB 010002) discloses a receiver having a variable threshold slicer circuit. Figure 7 of this Specification shows an embodiment of a receiver in which provision is made for correcting for dc offset  
15       voltage so that data in a demodulated signal can be detected more accurately by slicing the signal. The dc offset voltage is initially estimated by applying the demodulated input signal to a first input of a differencing stage. A default value of a selected threshold voltage is applied to a second input of the differencing circuit and an output voltage comprising a dc offset voltage estimate plus noise  
20       is obtained. This output voltage is applied to an averaging circuit in which the voltage is averaged over a period corresponding to say 25 bit periods. A low pass filter filters the output of the averaging circuit to remove the noise and the result is stored as the dc offset voltage. In operation the stored dc offset voltage is subtracted from a selected threshold circuit to be used by a bit slicer  
25       and the difference voltage acts as a modified threshold voltage which is used by a bit slicer for slicing the demodulated voltage. Whilst this circuit functions satisfactorily it is desired that a dc offset circuit operating at frequencies used by systems such as Bluetooth™ should be more responsive.

30       Other techniques for compensating for dc offset voltage, base line wander and level correction all associated with unwanted disturbing influences on the signal transmission path are disclosed in US Patent Specifications 6,324,231 B1 and 6,175,728 B1, EP-A2-928215 and EP-B1-16503.

Some methods of dc offset voltage compensation are unable to be fully effective when there are long sequences of unvarying data such as 1s or 0s.

An object of the present invention is to prevent long sequences of non-varying data from affecting the dc offset voltage estimate and to make the offset estimate responsive to frequency drift.

According to a first aspect of the present invention there is provided a receiver comprising means for demodulating a received signal to produce an uncorrected demodulated signal, a dc offset voltage correcting circuit having an output for a corrected signal and a data recovery circuit coupled to the output, the dc offset voltage correcting circuit comprising an input for the uncorrected demodulated signal, a bit slicer for detecting received data, filtering means for regenerating the demodulated signal less noise and dc offset, subtracting means for subtracting the regenerated demodulated signal from the uncorrected demodulated signal to produce the dc offset voltage and a feedback circuit for feeding back the dc offset voltage to the bit slicer.

According to a second aspect of the present invention there is provided a method of dc offset voltage correction in a demodulated signal, comprising obtaining a dc free estimate of the demodulated signal, subtracting the dc free estimate of the demodulated signal from a contemporaneous version of the demodulated signal to obtain a dc offset voltage and subtracting the dc offset voltage from the demodulated signal.

The present invention is based on the concept that removing the effect of the demodulated signal from an input signal will provide an estimate of the dc offset voltage. This estimate can be subtracted from the input signal to provide a signal in which data can be detected accurately by slicing. This architecture has the advantage of preventing long sequences of non-varying data from affecting the dc offset voltage estimate and of making the offset estimate responsive to frequency drift by avoiding the use of filters having relatively long time constants.

A level correction circuit architecture disclosed in EP-B1-16503 is concerned with correcting the level of television teletext signals and differs

from that used in the receiver circuit made in accordance with the present invention in that a waveform corrected signal is derived from a bit slicer coupled to an output of a level correcting circuit. Additionally the waveform corrected signal is applied to an amplitude control circuit for the correction of the "a" level corresponding to a logic one level in the television signal and it is the output from this circuit which is subtracted from an input signal to obtain an error signal. The error signal is integrated in an integrating circuit to produce a level control signal which is supplied to the level correcting circuit. The amplitude control signal corresponding to the level "a" is derived from the input signal by obtaining the difference between a logic zero level which corresponds to the black level "b" and the logic one value corresponding with a level "(b + a)" in the television signal. The levels "b" and "(b + a)" can show variations caused by disturbing influences on the transmission path. This cited circuit is not concerned with overcoming the effects of unwanted dc offset voltages. The receiver circuit made in accordance with the present invention does not need an amplitude control circuit for signal level control between two logic levels.

The present invention will now be described, by way of example, with reference to the accompanying drawings, wherein:

Figure 1 is a block schematic diagram of an embodiment of a radio receiver made in accordance with the present invention,

Figure 2 illustrates a data signal in a simulated Bluetooth™ system,

Figure 3 illustrates is a demodulated version of the data signal shown in Figure 2,

Figure 4 illustrates a dc estimate obtained using the dc offset voltage circuit included in the receiver shown in Figure 1, and

Figures 5 and 6, for the sake of comparison only, respectively illustrate dc offset voltage estimates obtained using a simulated "MaxMin" circuit and a simulated 10kHz bandwidth low pass filter.



Referring to Figure 1, the illustrated radio receiver comprises an antenna 10 for receiving for example a Bluetooth™ signal which may comprise random data as well as long sequences of non-varying data, viz long sequences of ones or zeroes. The received signal is amplified in a rf amplifier 12 and the amplified signal is applied to a frequency down-conversion stage 14. The frequency down conversion stage 14 comprises a mixer (or multiplier) 16 having a first input coupled to an output of the rf amplifier 12 and a second input coupled to a local oscillator signal generating means 18, for example a frequency synthesizer. A bandpass filter 20 is coupled to an output of the frequency down-conversion stage 14 to select an uncorrected demodulated signal  $v_{in}$  which includes a dc offset voltage and noise.

The uncorrected demodulated signal  $v_{in}$  is supplied to a dc offset voltage correction circuit 22. Waveform diagrams have been provided to facilitate an understanding of the operation of the dc offset voltage correction circuit 22. The circuit 22 comprises a first subtracting stage 24 having a first input 25 for the uncorrected demodulated signal  $v_{in}$ , a second input 26 for a dc offset voltage  $v_{off}$  recovered by the circuit and an output 27. The signal on the output 27 is the uncorrected demodulated signal minus dc offset voltage, ( $v_{in} - v_{off}$ ), which is supplied to a bit slicer 30 and by way of a line 28 to a data recovery stage 42. The output of the bit slicer 30 comprises an estimate of the demodulated signal and this signal is supplied to a low pass filter 32 which produces a dc free estimate of the demodulated signal. The low pass filter 32 has a characteristic which approximates to the transfer function of the transmit bit shaping filter and the complete receive train including for example a channel filter and the demodulator. In the case of a Bluetooth™ system the low pass filter 32 could be modelled as a 300kHz bandwidth 5<sup>th</sup> order Tchebycheff 0.5dB filter.

A second subtracting stage 34 has a first input 35 coupled to an output of the low pass filter 32, a second input 36 coupled to a time delay stage 38 for delaying the uncorrected demodulated signal  $v_{in}$  by a time corresponding to the propagation of the signal through the circuit stages 24, 30 and 32, and an output. The output signal from the second subtracting stage 34 is the

contemporaneous dc offset voltage plus noise. The noise is removed using a low pass filter 40 to provide the dc offset voltage  $v_{off}$  which is fed back to the first input 26 of the first subtracting stage 24. The time constant of the low pass filter 40 should be made as short as practically possible.

5 In implementing the dc offset voltage correction circuit 22 the performance can be enhanced by use of an intelligent bit slicer 30 and by using a variable bandwidth filter controlled by the estimated rate of drift in place of the low pass filter 40.

The performance improvement of this method of correcting for dc offset  
10 voltages becomes particularly apparent when data is not entirely random but contains long sequences of non-varying data as shown in Figures 2 to 4. More particularly Figures 2 to 4 show simulation results for a Bluetooth™ system. A fixed DC error of 0.03 has been applied, which is equivalent to about 100kHz error. Figure 2 shows the data, Figure 3 shows the demodulated  
15 signal, and Figure 4 shows the dc offset voltage estimation.

For the sake of comparison only, Figures 5 and 6 respectively illustrate the results of simulating signal cancellation feedback dc offset estimations using the so-called "MaxMin" circuit in which the dc offset voltage is the average of maxima and minima of the signal and a conventional integration  
20 technique using a 10kHz bandwidth low pass filter. Although the relative performance of these techniques depends on the optimisation of the filters it is clearly evident that the "MaxMin" circuit is particularly inferior when used with long sequences of non-varying data and, although the integration technique is better, it is still inferior to the results obtained using the described dc offset  
25 voltage correction circuit.

Although the present invention has been described with reference to a receiver having dc offset voltage correction, the teachings of the present invention may be applied to automatic frequency control (AFC) subject to the dc offset voltage estimation being more rapid than the delay through the  
30 receiver and the AFC loop thereby avoiding introducing unwanted oscillation.

In the present specification and claims the word "a" or "an" preceding an element does not exclude the presence of a plurality of such elements. Further,

the word "comprising" does not exclude the presence of other elements or steps than those listed.

From reading the present disclosure, other modifications will be apparent to persons skilled in the art. Such modifications may involve other  
5 features which are already known in the design, manufacture and use of radio receivers and component parts therefor and which may be used instead of or in addition to features already described herein. Although claims have been formulated in this application to particular combinations of features, it should be understood that the scope of the disclosure of the present application also  
10 includes any novel feature or any novel combination of features disclosed herein either explicitly or implicitly or any generalisation thereof, whether or not it relates to the same invention as presently claimed in any claim and whether or not it mitigates any or all of the same technical problems as does the present invention. The applicants hereby give notice that new claims may be  
15 formulated to such features and/or combinations of such features during the prosecution of the present application or of any further application derived therefrom.

## CLAIMS

1. A receiver comprising means (14) for demodulating a received signal to produce an uncorrected demodulated signal, a dc offset voltage correcting circuit (22) having an output (28) for a corrected signal and a data recovery circuit (42) coupled to the output, the dc offset voltage correcting circuit (22) comprising an input for the uncorrected demodulated signal ( $v_{in}$ ), a bit slicer (30) for detecting received data, filtering means (32) for regenerating the demodulated signal less noise and dc offset, subtracting means (34) for subtracting the regenerated demodulated signal from the uncorrected demodulated signal to produce the dc offset voltage ( $v_{off}$ ) and a feedback circuit for feeding back the dc offset voltage to the bit slicer.
2. A receiver as claimed in claim 1, characterised in that the filtering means (32) is a low pass filter having a characteristic substantially the same as the transfer function of at least the complete receiver chain.
3. A receiver as claimed in claim 2, characterised by delay means (38) for delaying the uncorrected demodulated signal by at least the duration of the time delay due to the transmission of a signal through the filtering means.
4. A receiver as claimed in any one of claims 1 to 3, characterised in that the feedback circuit includes a low pass filter (40).
5. A receiver as claimed in any one of claims 1 to 3, characterised in that the feedback circuit includes a variable bandwidth filter controlled by the estimated rate of drift.
6. A receiver as claimed in any one of claims 1 to 5, characterised by another subtracting stage (24) having a first input (25) for the uncorrected demodulated signal ( $v_{in}$ ) and a second input (26) for the dc offset voltage ( $v_{off}$ )

and an output (27) coupled to the bit slicer (30) and to the data recovery circuit (42).

5        7.     A method of dc offset voltage correction in a demodulated signal, comprising obtaining a dc free estimate of the demodulated signal, subtracting the dc free estimate of the demodulated signal from a substantially contemporaneous version of the demodulated signal to obtain a dc offset voltage and subtracting the dc offset voltage from the demodulated signal.

10       8.     A method as claimed in claim 7, characterised by bit slicing a difference signal formed by subtracting the dc offset voltage from the demodulated signal to provide an estimate of the demodulated signal and by filtering the estimate of the demodulated signal to obtain a dc free estimate of the demodulated signal.

15

9.     A method as claimed in claim 7 or 8, characterised by filtering the dc offset voltage.

20       10.    A method as claimed in claim 7, 8 or 9, characterised by delaying the demodulating signal prior to subtracting the dc free estimate of the demodulated signal.

25       11.    A receiver constructed and arranged to operate substantially as hereinbefore described with reference to and as shown in the accompanying drawings.

12.    A method of dc offset voltage correction in a demodulated signal, substantially as hereinbefore described with reference to the accompanying drawings.

30

## ABSTRACT

**RECEIVER HAVING DC OFFSET VOLTAGE CORRECTION**

5        A receiver comprises a frequency down-conversion stage (14) for demodulating a received signal to produce an uncorrected demodulated signal ( $v_{in}$ ), a dc offset voltage correcting circuit (22) having an output (28) for a corrected signal and a data recovery circuit (42) coupled to the output. The dc offset voltage correcting circuit (22) comprises an input for the uncorrected  
10 demodulated signal ( $v_{in}$ ), a bit slicer (30) for detecting received data, a filter (32) coupled to the output of the bit slicer for regenerating the demodulated signal less noise and dc offset, a subtracting stage (34) for subtracting the regenerated demodulated signal from a delayed version of the uncorrected demodulated signal to produce the dc offset voltage ( $v_{off}$ ) and a feedback  
15 circuit for feeding back the dc offset voltage to the bit slicer.

(Figure 1)

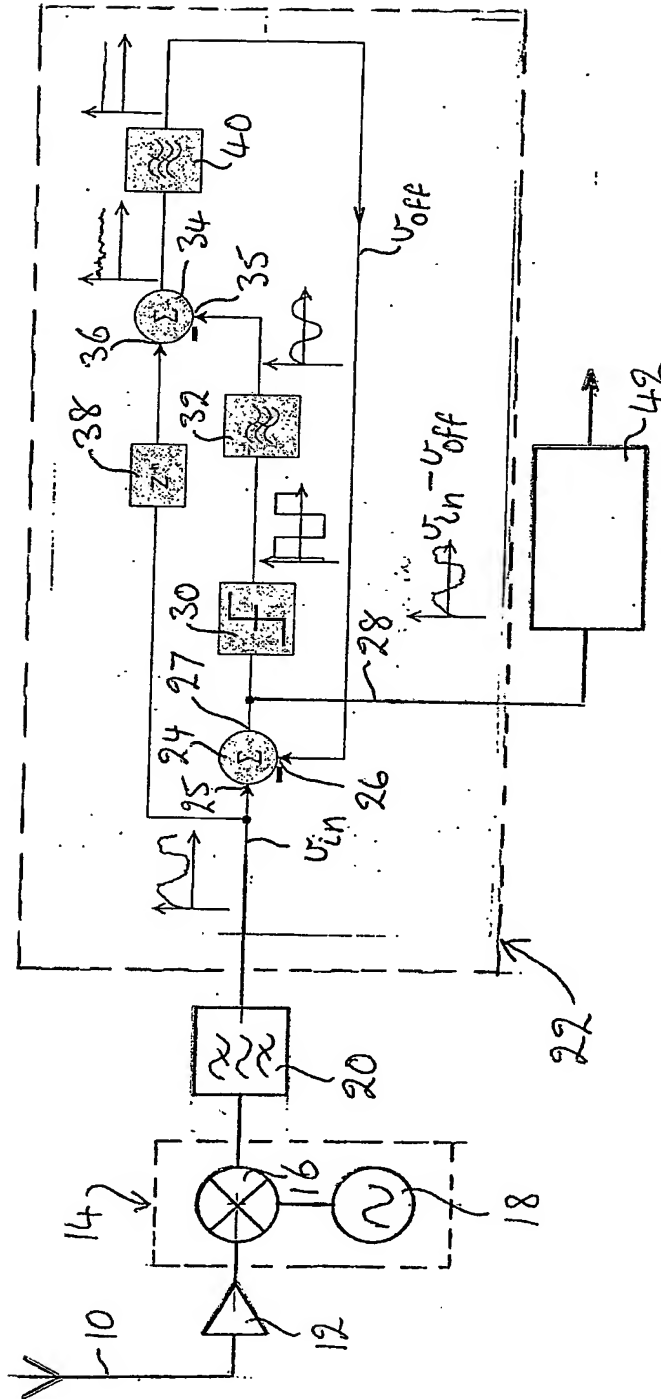


Fig. 1

2/2

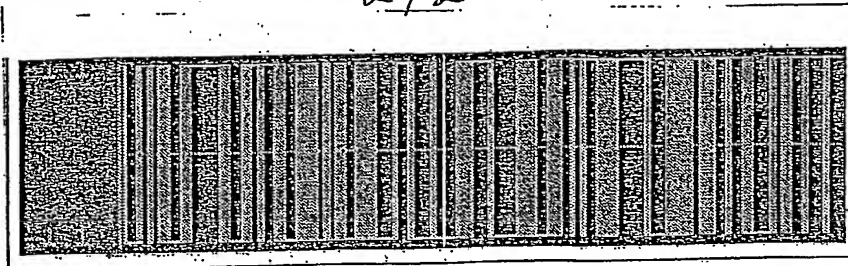


Fig. 2

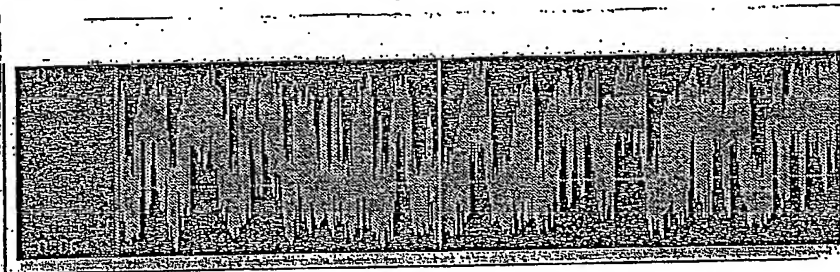


Fig. 3

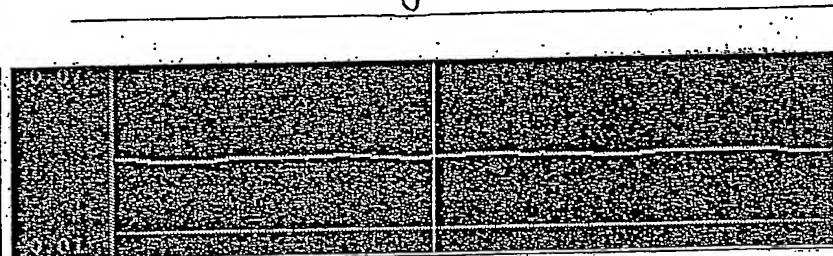


Fig. 4

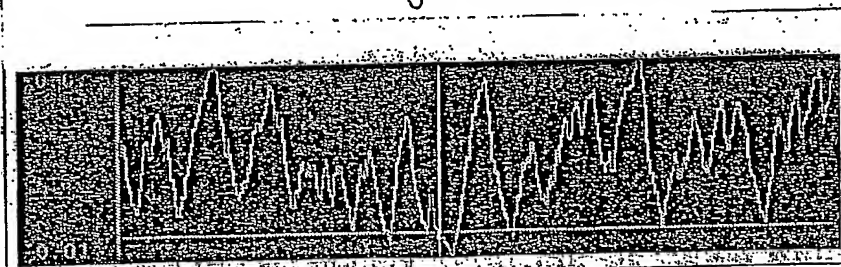


Fig. 5

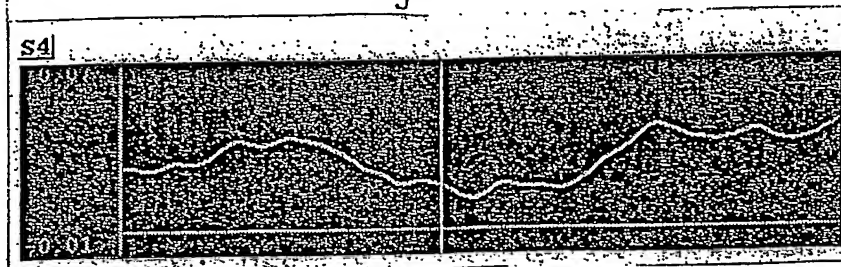


Fig. 6